


5 For anti-ligature and anti-vandal installations, it is imperative that the luminaire body sits flat on the ceiling.

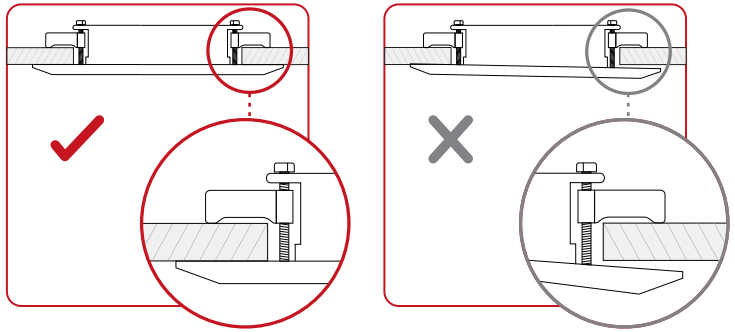

6 Do not cover luminaire or driver with thermally insulating material **(B)**. It is recommended to allow a minimum of 50 mm clearance from combustible materials, as shown in **(C)**, **(D)** and **(E)**.

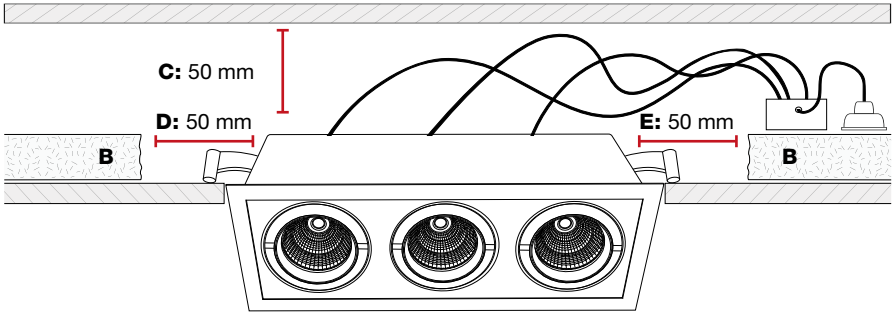

7 Restore power once installation has been completed.

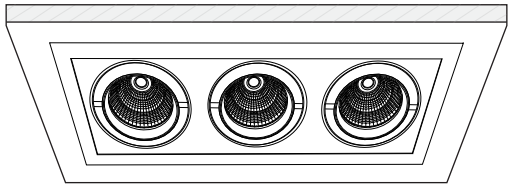


Trend Lighting Co. Pty Ltd

V1-22.01.2025 Product designs and technical data may be subject to change.

Midiled XMB325 Recessed Downlight

Installation Guide

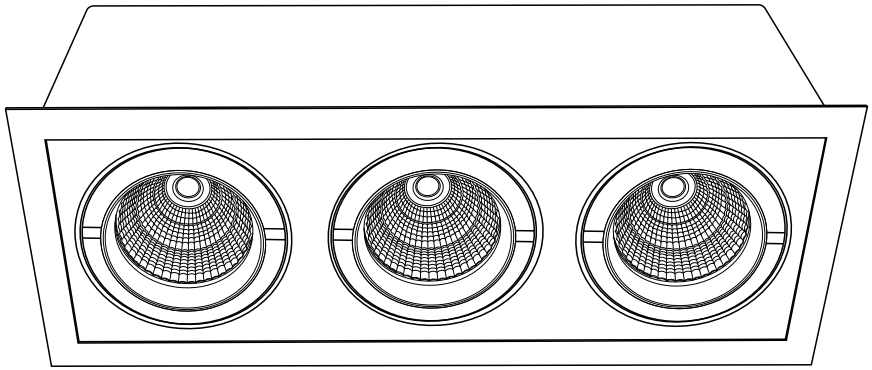

TREND
LIGHT BY SOLID STATE

Midiled XMB325

trendlighting.com.au

For warranty information, please visit
trendlighting.com.au/warranty

Important Safety Information

Please read these installation instructions carefully before installing this luminaire.

- This product must be installed by a licensed electrician in accordance with AS/NZS 3000 and local regulations.
- Isolate the mains power supply prior to installation.
- Only reconnect mains power after installation is completed.
- No part of the luminaire should be altered or modified.
- This product is not user serviceable.


Approvals & Notes

The RCM marking of this product applies to AS/NZS 4417.1 “Regulatory compliance mark (RCM) for electrical and electronic equipment”. This product is designed to conform to AS/NZS 60598 “Luminaires, general requirements and tests”.


IP20

CLEARANCE NON IC MANDATORY


1 Isolate the mains power supply prior to commencing installation.

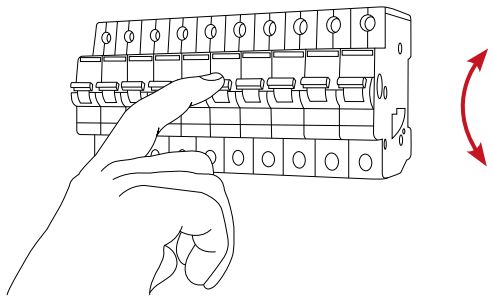

2 Mark at the correct location. Cut a hole in the ceiling in accordance with cutout size.
XMB325 ceiling cutout: **472 x 165 mm**

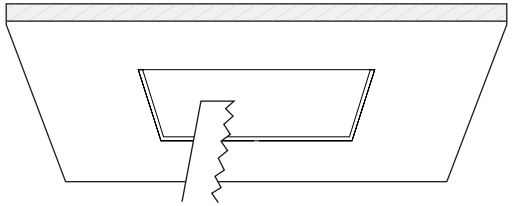

3 Connect luminaire to 240V plug socket.

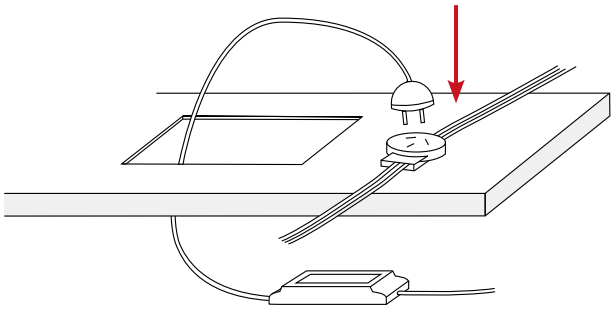

4 Secure the luminaire into the ceiling by tighthen the 4 screws to lower the fold out tabs. Tightening the screws will lower the fold-out tabs clamping the luminaire to the ceiling as shown in **(A)**.

