TREND
LIGHT BY SOLID STATE

Midiled XMC225

2 x 25W Recessed Adjustable Rectangular Downlight

Scan to explore XMC225 online

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XMC225	3 (3000K) 4 (4000K)	(CRI 90+ Standard)	MB (Medium)	W (White) B (Black)	ND (Non-dimmable) LT (Leading & Trailing Edge) DALI (DALI)

Order Code **XMC2254-MB-W-ND**



To configure this downlight, please visit
trendlighting.com.au/product/midiled-XMC225

Product Features

- Twin recessed adjustable LED downlight in rectangular housing
- Also available in a single spot (XMC125) or as a twin configuration (XMC325)
- CRI 90+ available in 3000K and 4000K CCT options
- Anodised black heatsink for effective thermal management ensuring high output and long lifespan
- Supplied with 2 drivers and 2 flex plugs


Product Attributes

LED COB | CRI 90+ | IP20 | NON IC | NON DIM

Physical Characteristics

Trim Colour	White | Black
Tilt Angle	35° x 35°
Dimensions (LxWxH)	330 x 175 x 110 mm
Spring Height	35 mm
Cutout	Rectangular 310 x 160 mm
Weight	1850 g

Dimensions (mm)

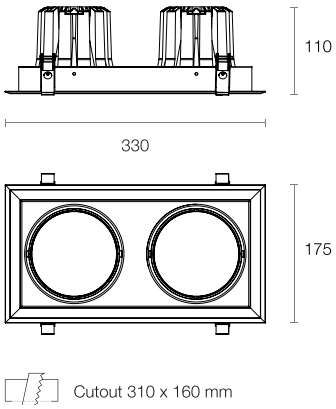

Technical Characteristics

Based on XMC2254-MB-W-ND

LED Power	2 x 25W
LED Type	COB
Lumen Output	5910 lm
Luminous Flux	5000 lm
Efficacy	94.70 lm/W
Colour Temperature	3000K | 4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80)
Beam Angle	Medium
System Power	52.8W Typical
Driver Model	Trend 150020-700 (Non-dim) x 2
Input	180-265V AC 50/60 Hz
Output	30-40V DC 700mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable | Leading & Trailing Edge | DALI

General Characteristics

Category	Downlights
Family	Midiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20

© Trend Lighting. Specifications are subject to change.

Midiled XMC225

2 x 25W Recessed Adjustable Rectangular Downlight

Scan to explore XMC225 online

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XMC225	3 (3000K) 4 (4000K)	(CRI 90+ Standard)	MB (Medium)	W (White) B (Black)	ND (Non-dimmable) LT (Leading & Trailing Edge) DALI (DALI)

Order Code **XMC2254-MB-W-ND**

To configure this downlight, please visit
trendlighting.com.au/product/midiled-XMC225

Trim Colour



W
White Trim



B
Black Trim

© Trend Lighting. Specifications are subject to change.