



Illuminatinig since 1986



UnoledDownlights

Multiled Downlights

Econoled

IP65 Downlights

Candela Surface Mounted Downlights

Auro

Track Spot

SkylytePanel Lights

Mono

Diffused Battens

Nero

Weatherproof Battens

Luna

Oyster Lights

Bayled

Lowbays

Trend For Trade Made For Trade

Wholesalers and installers alike have said they simply want a dependable and cost effective product. It's also what their clients want.

That's exactly what Trend For Trade delivers.

Kerry Kattos

Trend Lighting
National Sales Manager - Wholesale

Diversity

The diversity of our workforce helps us thrive every day. Diversity is our greatest strength, and something that is echoed throughout our entire business from our diverse team and varied collection of products, to our extensive portfolio of client projects and partnerships.

Innovation

Creativity, innovation and continuous improvement are built into our company's DNA. The world of lighting is ever-evolving and we celebrate this with a constant focus on learning, developing and improving everything we do.

Efficiency

We prioritise efficiency in everything we do, from products and solutions to our work approach. We aim for optimal results with minimal waste, benefiting both our organisation and clients through saved time, effort, and money for superior products and services.

Quality

With 37 years of unwavering commitment, we take pride in delivering top-notch quality. Our focus on durability, reliability, craftsmanship, and longevity has built a reputation for exceeding customer expectations.

Value

Our success stems from balancing quality and affordability, providing value through dedication to quality, accessibility, convenience, and longevity in all our products and services. Clients save time, effort, and money while receiving superior products and services.



trendfortrade.com.au 3

Product Overview

Trend For Trade offers a diverse array of products designed to seamlessly infuse comfort and warmth into various architectural settings. Explore our catalogue pages, where you can navigate by category or series, featuring a thoughtfully curated selection of essential lighting fixtures tailored to meet the needs of our clients.

Browse by Categories	Browse by Series	
Downlights	Unoled	7
	TL10	9
	Multiled	11
	DTL10	13
	DTL12	15
	DTL18	19
	DTL25	21
	Econoled	23
	EC7	25
	ER7	29
	Candela	33
	CAN7	35
	CAN12	39
Track System	Auro	41
	TS1525	43
	3 Circuit Track	47
	TRA3C	49

Browse by Categories	Browse by Series	
Panels	Skylyte	51
	PL0301	53
	PL0601	55
	PL1201	59
Battens	Mono	61
	ZSB20	63
	ZSB38	67
	Nero	69
	WP0601	71
	WP1201	75
	WP1201 Emergency	79
Oyster Lights	Luna	81
	ST12	83
	ST18	85
	ST30	89
Lowbays	Bayled	91
	XPU100	93
	XPU150	97

trendfortrade.com.au

Unoled

epitome of reliability and performance in a compact package



Explore Unoled

Unoled offers a durable lighting solution with its robust cast aluminium construction and corrosion-resistant finish. The opal polycarbonate diffuser ensures even light distribution for a perfectly illuminated space. Additionally, it features a pressure-cast aluminium heatsink for efficient heat dissipation, maintaining optimal performance and extending its lifespan. Choose Unoled for outstanding performance and longevity in lighting.



Unoled TL10

10 Watt Recessed Compact Tricolour Downlight
















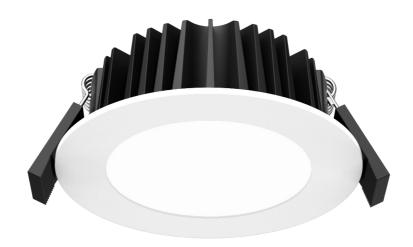

Product	CCT	Trim Colour	Driver	Order Code
TL10	Tricolour	White Trim	Trailing Edge	TL10-TRI-W-TE

Recessed fixed SMD LED downlight designed with a slim profile and extra wide light beam distribution. Manufactured with an aluminium body and finished in durable white powder coating.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white), and 5700K (daylight). Supplied with a remote flicker free Trailing Edge dimmable driver.

Specifications

Trim Colour Options	White
Cutout	Ø85-95 mm
Dimensions	Ø104 x 45 (H) mm
Weight	170 g
LED Power	10W
LED Type	SMD
Lumen Output	1000 lm
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 80+
Lifetime	50,000 hours (L70)
Beam Angle	Wide 120°
System Power	11.7W Typical
Efficacy	Up to 87 lm/W
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Trailing Edge Dimmable
Driver	Remote, Flicker Free
Connection Type	Flex and Plug
Ingress Protection	IP44
Insulation Rating	IC-4 AS/NZS 60598.2.2
IEC Protection	Class II
Warranty	3 Years





Multiled

multifaceted. multifunctional. multidimensional.



Multiled offers various size options to fit any space perfectly. Its sleek profile adds modern elegance, and the opal polycarbonate diffuser provides soothing uniform light distribution. Multiled excels not only in aesthetics but also in quality and performance. Its durable aluminium profile ensures efficient heat dissipation, ensuring long-lasting performance without overheating issues. Enjoy a customised lighting experience with this range, choosing from different sizes and power options to achieve the ideal balance of brightness and energy efficiency.



Explore Multiled

Downlights



Multiled DTL10

10 Watt Deep Recessed Tricolour Downlight


















Product	CCT	Trim Colour	Driver	Order Codes
DTL10	Tricolour	White Trim	Leading & Trailing Edge	DTL10-TRI-W-LT
		Black Trim		DTL10-TRI-B-LT

Compact deep recessed fixed SMD LED downlight with a slim design and opal polycarbonate diffuser for uniform lighting distribution. Aluminium housing provides excellent thermal management for exceptional heat dissipation.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with a remote flicker free Leading & Trailing Egde dimmable driver.

Specifications

Specifications	
Trim Colour Options	White Black
Cutout	Ø90-95 mm
Dimensions	Ø110 x 52 (H) mm
Weight	260 g
LED Power	10W
LED Type	SMD
Lumen Output	990 lm
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours (L70)
Beam Angle	Wide 90°
System Power	9.5W Typical
Efficacy	Up to 104 lm/W
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Leading & Trailing Edge
Driver	Remote, Flicker Free
Connection Type	Flex and Plug
Ingress Protection	IP54
Insulation Rating	IC-4 AS/NZS 60598.2.2
IEC Protection	Class II
Warranty	3 Years





Multiled DTL12

12 Watt Deep Recessed Tricolour Downlight


















Product	ССТ	Trim Colour	Driver	Order Codes
DTL12	Tricolour	White Trim	Leading & Trailing Edge	DTL12-TRI-W-LT
		Black Trim		DTL12-TRI-B-LT

Medium-sized deep recessed fixed SMD LED downlight with a slim design and opal polycarbonate diffuser for uniform lighting distribution. Aluminium housing provides excellent thermal management for exceptional heat dissipation. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with a remote flicker free Leading & Trailing Egde dimmable driver.

Specifications

Specifications	
Trim Colour Options	White Black
Cutout	Ø120-130 mm
Dimensions	Ø145 x 53 (H) mm
Weight	400 g
LED Power	12W
LED Type	SMD
Lumen Output	1415 lm
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours (L70)
Beam Angle	Wide 90°
System Power	11.7W Typical
Efficacy	Up to 120 lm/W
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Leading & Trailing Edge
Driver	Remote, Flicker Free
Connection Type	Flex and Plug
Ingress Protection	IP54
Insulation Rating	IC-4 AS/NZS 60598.2.2
IEC Protection	Class II
Warranty	3 Years





Track System

Downlights

Panel Light

sattens

Oyster Light

wbays



Multiled DTL18

18 Watt Deep Recessed Tricolour Downlight

















Product	CCT	Trim Colour	Driver	Order Codes
DTL18	Tricolour	White Trim	Leading & Trailing Edge	DTL18-TRI-W-LT
		Black Trim		DTL18-TRI-B-LT


Large-sized deep recessed fixed SMD LED downlight with a slim design and opal polycarbonate diffuser for uniform lighting distribution. Aluminium housing provides excellent thermal management for exceptional heat dissipation. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with a remote flicker free Leading & Trailing Egde dimmable driver.

Specifications

opecinications	
Trim Colour Options	White Black
Cutout	Ø160-170 mm
Dimensions	Ø190 x 53 (H) mm
Weight	580 g
LED Power	18W
LED Type	SMD
Lumen Output	2145 lm
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours (L70)
Beam Angle	Wide 90°
System Power	17.6W Typical
Efficacy	Up to 121 lm/W
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Leading & Trailing Edge
Driver	Remote, Flicker Free
Connection Type	Flex and Plug
Ingress Protection	IP54
Insulation Rating	IC-4 AS/NZS 60598.2.2
IEC Protection	Class II
Warranty	3 Years





Multiled DTL25

25 Watt Deep Recessed Tricolour Downlight

















Product	CCT	Trim Colour	Driver	Order Codes
DTL25	Tricolour	White Trim	Leading & Trailing Edge	DTL25-TRI-W-LT
		Black Trim		DTL25-TRI-B-LT


Extra large-sized deep recessed fixed SMD LED downlight with a slim design and opal polycarbonate diffuser for uniform lighting distribution. Aluminium housing provides excellent thermal management for exceptional heat dissipation. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with a remote flicker free Leading & Trailing Egde dimmable driver.

Specifications

opecinications	
Trim Colour Options	White Black
Cutout	Ø200-210 mm
Dimensions	Ø230 x 53 (H) mm
Weight	780 g
LED Power	25W
LED Type	SMD
Lumen Output	2925 lm
CCT Technology	Tri-colour Selectable
Colour Temperature 3000K, 4000K, 5700	
Colour Rendering CRI 85+	
Lifetime	50,000 hours (L70)
Beam Angle	Wide 90°
System Power	23.7W Typical
Efficacy	Up to 123 lm/W
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Leading & Trailing Edge
Driver	Remote, Flicker Free
Connection Type	Flex and Plug
Ingress Protection	IP54
Insulation Rating	IC-4 AS/NZS 60598.2.2
IEC Protection	Class II
Warranty	3 Years





Econoled

our flagship downlight series

Econoled is powered by a high-output colour changing COB LED, delivering impressive brightness and accurate colour reproduction (CRI 90+). With an IP65 rating, it's versatile for indoor and outdoor use, resisting dust, moisture, and occasional water exposure. Experience exceptional light quality with even and balanced illumination that enhances any space's ambiance. Econoled strikes the ideal balance between functionality and aesthetics, perfect for residential and commercial applications.





Explore Econoled

Downlights



Econoled EC7

7 Watt IP65 Rated Recessed Tricolour Downlight


















Product	ССТ	Trim Colour	Driver	Order Codes
EC7	Tricolour	White Trim	Leading & Trailing Edge	EC7-TRI-W-LT
		Black Trim		EC7-TRI-B-LT

Recessed fixed COB LED downlight with a broad trim and wide collimating lens. Manufactured with an aluminium body and finished with corrosion resistant powder coating. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with a remote flicker free Leading & Trailing Egde dimmable driver.

Specifications

opecinications			
Trim Colour Options	White Black		
Cutout	Ø76-92 mm		
Dimensions	Ø105 x 58 (H) mm		
Weight	160 g		
LED Power	7W		
LED Type	COB		
Lumen Output	802 lm		
CCT Technology	Tri-colour Selectable		
Colour Temperature (CCT)	3000K, 4000K, 5700K		
Colour Rendering	CRI 90+		
Lifetime	50,000 hours (L70)		
Beam Angle	Wide 60°		
System Power	8.3W Typical		
Efficacy	Up to 96 lm/W		
Input	200-240V AC 50 Hz		
Power Factor	>0.95		
Dimming	Leading & Trailing Edge		
Driver	Remote, Flicker Free		
Connection Type	Flex and Plug		
Ingress Protection	IP65		
Insulation Rating	IC-4 AS/NZS 60598.2.2		
IEC Protection	Class II		
Warranty	3 Years		



Height 58 mm



Overall Diameter 105 mm



Downlights



trendfortrade.com.au

27

Econoled ER7

7 Watt IP65 Rated Recessed Tricolour Downlight


















Product	ССТ	Trim Colour	Driver	Order Codes
ER7	Tricolour	White Trim	Leading & Trailing Edge	ER7-TRI-W-LT
		Black Trim		ER7-TRI-B-LT

Recessed fixed COB LED downlight with slim profile and deep conical housing. Manufactured with an aluminium body and finished with corrosion resistant powder coating. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with a remote flicker free Leading & Trailing Egde dimmable driver.

Specifications

opecinications			
Trim Colour Options	White Black		
Cutout	Ø90-92 mm		
Dimensions	Ø100 x 88 (H) mm		
Weight	175 g		
LED Power	7W		
LED Type	COB		
Lumen Output	802 lm		
CCT Technology	Tri-colour Selectable		
Colour Temperature (CCT)	3000K, 4000K, 5700K		
Colour Rendering	CRI 90+		
Lifetime	50,000 hours (L70)		
Beam Angle	Wide 60°		
System Power	8.3W Typical		
Efficacy	Up to 96 lm/W		
Input	200-240V AC 50 Hz		
Power Factor	>0.95		
Dimming	Leading & Trailing Edge		
Driver	Remote, Flicker Free		
Connection Type	Flex and Plug		
Ingress Protection	IP65		
Insulation Rating	IC-4 AS/NZS 60598.2.2		
IEC Protection	Class II		
Warranty	3 Years		





Overall Diameter 100 mm





Candela

can add value.
can deliver results.
can outperform others.



Explore Candela

Candela is meticulously engineered with superb rendering, IP54 protection, energy efficiency and effective glare control. Available in two sizes and three captivating trim colours, this surface-mounted downlight series seamlessly integrates into any space, enhancing its beauty with remarkable lighting performance. With a focus on energy efficiency, Candela minimises power consumption while maintaining excellent illumination, providing sustainability and cost-effectiveness.







Candela CAN7

7 Watt Surface Mounted Compact Tricolour Downlight















Product	CCT	Trim Colour	Driver	Order Codes
CAN7	Tricolour	White Trim	Leading & Trailing Edge	CAN7-TRI-W-WI-LT
		Black Trim		CAN7-TRI-B-BI-LT
		White Trim & Black Insert		CAN7-TRI-W-BI-LT

Recessed fixed SMD LED downlight designed with a slim profile and extra wide light beam distribution. Manufactured with an aluminium body and finished in durable white powder coating.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white), and 5700K (daylight). Supplied with a remote flicker free Trailing Edge dimmable driver.

Specifications

Specifications	
Trim Colour Options	White Black
Dimensions	Ø95 x 110 (H) mm
Weight	583 g
LED Power	7W
LED Type	COB
Lumen Output	830 lm
Efficacy	Up to 94 lm/W
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 90+
Lifetime	50,000 hours (L70)
Beam Angle	Wide 60°
System Power	8.3W Typical
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Leading & Trailing Edge
Driver	Integral, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP54
IEC Protection	Class II
Warranty	3 Years

Height 110 mm



Width 95 mm

Conduit Box 51 mm



Mounting Plate Ø95 mm

35





Candela CAN12

12 Watt Surface Mounted Sleek Tricolour Downlight















Product	CCT	Trim Colour	Driver	Order Codes
CAN12	Tricolour	White Trim	Leading & Trailing Edge	CAN12-TRI-W-WI-LT
		Black Trim		CAN12-TRI-B-BI-LT
		White Trim & E	Black Insert	CAN12-TRI-W-BI-LT


Surface mounted fixed COB LED downlight with a sleek profile and wide collimating lens. Manufactured with an aluminium body and powder coat finish.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with an integral flicker free Leading and Trailing Edge dimmable driver.

Specifications

White Black
Ø95 x 150 (H) mm
683 g
12W
COB
1150 lm
Up to 94 lm/W
Tri-colour Selectable
3000K, 4000K, 5700K
CRI 90+
50,000 hours (L70)
Wide 60°
12.5W Typical
200-240V AC 50 Hz
>0.95
Leading & Trailing Edge
Integral, Flicker Free
Hardwired
IP54
Class II
3 Years

Height 150 mm



Width 95 mm

Conduit Box 51 mm



Mounting Plate Ø95 mm

Auro

a luminaire that epitomises versatility in its most brilliant form

Auro is more than just a track light—it's a statement of sophisticated illumination. Designed to adapt to diverse environments, it is equipped with innovative technology, allowing users to effortlessly switch between three wattage settings and a spectrum of colour temperature options (3000K, 4000K, 5000K). Recommended for areas where precision is paramount, Auro excels at highlighting specific elements or points of interest, adding a touch of sophistication to every illuminated space.







Auro TS1525

Switchable Wattage Tricolour Track Spot


















Product	CCT	Trim Colour	Driver	Order Codes
TS1525	Tricolour	White Trim	Non-dim	TS1525-TRI-W-ND
		Black Trim		TS1525-TRI-B-ND

Track mounted LED spotlight designed with a slim profile and manufactured with an aluminium powder coated body. An ideal lighting solution for architectural applications.


Equipped with technology that allows users to alternate between three wattage settings and colour temperature options (3000K, 4000K, 5000K) offering versatility and customisation. Supplied with an integral flicker free driver.

Specifications

Specifications	
Trim Colour Options	White Black
Dimensions	Ø85 x 270 (H) mm
Weight	925 g
LED Power	Switchable 15W, 20W, 25W
LED Type	COB
Lumen Output	1600 lm, 2050 lm, 2500 lm
Efficacy	101 lm/W, 98 lm/W, 97 lm/W
CCT Technology	Tri-colour Switchable
Colour Temperature (CCT)	3000K, 4000K, 5000K
Colour Rendering	CRI 90+
Lifetime	50,000 hours
Beam Angle	Wide 60°
System Power	15.8W, 20.8W, 25.8W Typical
Input	220-240V AC 50/60 Hz
Power Factor	>0.90
Dimming	Non-dimmable
Driver	Integral, Flicker Free
Connection Type	Track Mounted
Ingress Protection	IP20
IEC Protection	Class I
Warranty	3 Years



Diameter 85 mm




85 mm





3 Circuit Track

designed for maximum flexibility

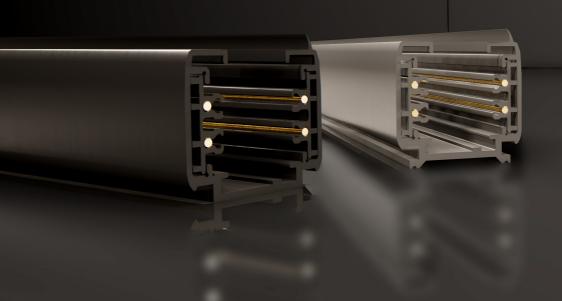



Explore 3 Circuit Track

47

3 Circuit Track TRA3C allows independent control of three separate circuits, providing unparalleled customisation of your lighting environment. Effortlessly adapt the intensity and direction of illumination for a dynamic and tailored lighting experience. Ideal for retail spaces, galleries, and modern interiors seeking precision and adaptability in lighting design.



3 Circuit Track TRA3C

3 Circuit Standard Track







Product	Trim Colour	Order Codes
TRA3C	White Trim	TRA3C-W
	Black Trim	TRA3C-B
	Silver Trim	TRA3C-S

Optional Accessories Available*


240V 3-circuit track enabling up to 3 lighting configurations to be set on one track and be controlled and switched individually.

Highly versatile and can be configured in both suspended and surface mounted applications. Designed to mix and match easily with a variety of track adapters to suit any lighting requirement.

Compatible with most common track systems. Can be supplied with EZ-Click wire suspension kit for quick and easy installation.

Specifications

Trim Colour Options	White Black Silver
Dimensions	33 (W) x 35 (H) mm
Ingress Protection	IP20



Width 33 mm

Skylyte

comparable to the luminosity of the sky

Skylyte features a powder-coated aluminum frame and microprismatic diffuser, offering both aesthetic appeal and excellent light distribution. With a slim profile, Skylyte seamlessly integrates into any space, adding sophistication to your interior. Choose from various mounting kits, such as plaster recessed, surface mounted, or suspension to meet your specific installation needs.



Track System

Panel Light

Battens

Oyster Light

owbavs

Skylyte PL0301

20 Watt 600mm Tricolour Rectangular Panel
















Product	CCT	Trim Colour	Driver	Order Code
PL0301	Tricolour	White Trim	Non-dim	PL0301-TRI-W-ND

Rectangular SMD LED panel manufactured with a powder coated aluminium frame with a low glare high output microprismatic diffuser which comes fitted as standard.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with a remote driver for easy maintenance.

Specifications

Trim Colour Options	White
Dimensions	595 (L) x 295 (W) x 12 (H) mm
Weight	1250 g
LED Power	20W
LED Type	SMD
Lumen Output	2250 lm
Efficacy	Up to 86 lm/W
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours
Beam Angle	Ultra Wide
System Power	22.4W Typical
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Non-dimmable
Driver	Remote, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP20
IEC Protection	Class II
Warranty	3 Years
Accessories*	Plaster Recessing Kit Surface
	Mounting Kit Suspension Kit



Skylyte PL0601

30 Watt 600mm Tricolour Square Panel














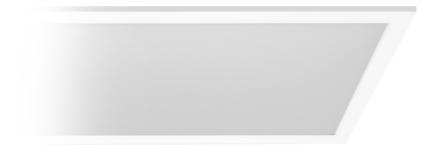


Product	CCT	Trim Colour	Driver	Order Code
PL0601	Tricolour	White Trim	Non-dim	PL0601-TRI-W-ND

Square SMD LED panel manufactured with a powder coated aluminium frame with a low glare high output microprismatic diffuser which comes fitted as standard.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with a remote driver for easy maintenance.

Specifications

Trim Colour Options	White
Dimensions	595 (L) x 595 (W) x 12 (H) mm
Weight	2350 g
LED Power	30W
LED Type	SMD
Lumen Output	3850 lm
Efficacy	Up to 87 lm/W
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours
Beam Angle	Ultra Wide
System Power	33W Typical
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Non-dimmable
Driver	Remote, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP20
IEC Protection	Class II
Warranty	3 Years
Accessories*	Plaster Recessing Kit Surface
	Mounting Kit Suspension Kit



Height 12 mm





Skylyte PL1201

30 Watt 1200mm Tricolour Rectangular Panel
















Product	CCT	Trim Colour	Driver	Order Code
PL1201	Tricolour	White Trim	Non-dim	PL1201-TRI-W-ND

Rectangular SMD LED panel manufactured with a powder coated aluminium frame with a low glare high output microprismatic diffuser which comes fitted as standard.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with a remote driver for easy maintenance.

_	_		_	
e,	ecit	Fina	+i^	ne

Trim Colour Options	White
Dimensions	1195 (L) x 295 (W) x 12 (H) mm
Weight	2550 g
LED Power	30W
LED Type	SMD
Lumen Output	3850 lm
Efficacy	Up to 87 lm/W
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours
Beam Angle	Ultra Wide
System Power	33W Typical
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Non-dimmable
Driver	Remote, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP20
IEC Protection	Class II
Warranty	3 Years
Accessories*	Plaster Recessing Kit Surface
	Mounting Kit Suspension Kit



Mono

illuminate with comfort

Featuring a sleek, streamlined design with a diffuser that softens and evenly distributes light, Mono is an ideal luminaire for various settings. These energy-efficient fixtures not only enhance the aesthetics of any room but also provide optimal brightness without harsh glare.



Explore Mono



Mono ZSB20

16 Watt IP65 & IK08 Rated 600mm Tricolour Diffused Batten

















Product	CCT	Trim Colour	Driver	Order Code
ZSB20	Tricolour	White Trim	Non-dim	ZSB20-TRI-W-ND

Surface mounted diffused LED batten featuring screwless design and manufactured with an aluminium powder coated body with high transmittance polycarbonate diffuser for wide light coverage. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with an integral flicker free driver and terminal block.

Specifications

•	
Trim Colour Options	White
Dimensions	600 (L) x 124 (W) x 60 (H) mm
Weight	1180 g
LED Power	16W
LED Type	SMD
Lumen Output	2350 lm
Efficacy	Up to 103.94 lm/W
CCT Technology	Tri-colour Switchable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours (L70)
Beam Angle	Very Wide
System Power	18W Typical
Input	220-240V AC 50/60 Hz
Power Factor	>0.90
Dimming	Non-dimmable
Driver	Integral, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP65
Impact Resistance	IK08
IEC Protection	Class II
Warranty	3 Years

Height 60 mm	
	Width 124 mm
	Length 600 mm

trendfortrade.com.au

Mono ZSB38

30 Watt IP65 & IK08 Rated 1200mm Tricolour Diffused Batten


















Product	CCT	Trim Colour	Driver	Order Code
ZSB38	Tricolour	White Trim	Non-dim	ZSB38-TRI-W-ND

Surface mounted diffused LED batten featuring screwless design and manufactured with an aluminium powder coated body with high transmittance polycarbonate diffuser for wide light coverage. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with an integral flicker free driver and terminal block.

Specifications

Trim Colour Options	White
Dimensions	1200 (L) x 124 (W) x 60 (H) mm
Weight	2140 g
LED Power	30W
LED Type	SMD
Lumen Output	4700 lm
Efficacy	Up to 106.59 lm/W
CCT Technology	Tri-colour Switchable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours (L70)
Beam Angle	Very Wide
System Power	34W Typical
Input	220-240V AC 50/60 Hz
Power Factor	>0.90
Dimming	Non-dimmable
Driver	Integral, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP65
Impact Resistance	IK08
IEC Protection	Class II
Warranty	3 Years



Nero

built to withstand challenging environments





Explore Nero

Featuring an impact-resistant polycarbonate diffuser and remarkable IP65 rating, Nero is the perfect lighting solution for demanding settings, allowing it to thrive in the harshest weather conditions. For added versatility, this series offers optional emergency lighting capabilities, ensuring safety and peace of mind during unexpected power outages. Come rain or shine, Nero continues to shine brightly, providing consistent and reliable performance.

trendfortrade.com.au

67

Nero WP0601

20 Watt 600mm Tricolour Weatherproof Batten

















Product	CCT	Trim Colour	Driver	Order Code
WP0601	Tricolour	White Trim	Non-dim	WP0601-TRI-W-ND

Surface mounted SMD LED weatherproof batten with IK08 impact protection. Manufactured from ABS plastic with an impact resistant polycarbonate diffuser for soft uniform light distribution. Integrated latch design allows access to the conveniently mounted terminal block for easy installation.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with an integral non-dimmable driver.

Specifications

White
618 (L) x 116 (W) x 74 (H) mm
1150 g
18W
SMD
2100 lm
Up to 105 lm/W
Tri-colour Selectable
3000K, 4000K, 5700K
CRI 85+
50,000 hours
Very Wide
20W Typical
200-240V AC 50 Hz
>0.95
Non-dimmable
Integral, Flicker Free
Hardwired
IP65
IK08
Class II
3 Years



Length 1215 mm



Width 116 mm

Nero WP1201

40 Watt IP65 & IK08 Rated 1200mm Tricolour Weatherproof Batten




















Product	CCT	Trim Colour	Driver	Sensor*	Order Codes
WP1201	Tricolour	White Trim	Non-dim		WP1201-TRI-W-ND
					WP1201-TRI-W-ND-MMS*

Optional Sensor*

Surface mounted SMD LED weatherproof batten with IK08 impact protection. Manufactured from ABS plastic with an impact resistant polycarbonate diffuser for soft uniform light distribution. Integrated latch design allows access to the conveniently mounted terminal block for easy installation.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with an integral non-dimmable driver. Optional motion sensor available.

opcomoations	
Trim Colour Options	White
Dimensions	1215 (L) x 116 (W) x 74 (H) mm
Weight	1950 g
LED Power	38W
LED Type	SMD
Lumen Output	4200 lm
Efficacy	Up to 105 lm/W
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours
Beam Angle	Very Wide
System Power	40W Typical
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Non-dimmable
Driver	Integral, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP65
Impact Protection	IK08
Sensor Type*	Microwave Motion Sensor
IEC Protection	Class II
Warranty	3 Years





Width 116 mm





Nero WP1201 Emergency

40 Watt IP65 & IK08 Rated 1200mm Tricolour Emergency Weatherproof Batten






















Product	CCT	Trim Colour	Driver	Emergency	Sensor*	Order Codes
WP1201 Emergency	Tricolour	White Trim	Non-dim	Maintained	WP1201-	TRI-W-ND-EMB
				WP	1201-TRI-W-	ND-EMB-MMS*

Surface mounted SMD LED weatherproof batten with IK08 impact protection and maintained emergency backup system. Manufactured from ABS plastic with an impact resistant polycarbonate diffuser for soft uniform light distribution. Integrated latch design allows access to the conveniently mounted terminal block for easy installation.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with an integral non-dimmable driver. Optional motion sensor available.

Specifications	
Trim Colour Options	White
Dimensions	1215 (L) x 116 (W) x 74 (H) mm
Weight	1950 g
LED Power	38W
LED Type	SMD
Lumen Output	4200 lm
Efficacy	Up to 105 lm/W
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 85+
Lifetime	50,000 hours
Beam Angle	Very Wide
System Power	40W Typical
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Non-dimmable
Driver	Integral, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP65
Impact Protection	IK08
Sensor Type*	Microwave Motion Sensor
IEC Protection	Class II
Warranty	3 Years





Width 116 mm

Luna

radiates brilliance akin to the moon itself





Explore Luna

Luna, a super slim oyster light that combines sleek design with an outstanding impact rating of IK10, making it a must-have for any space. Crafted with a lightweight fire-rated material, Luna not only ensures better heat and corrosion resistance but also guarantees durability and longevity. Much like the moon, the Luna emits a powerful and inviting glow that transforms any area into a beautifully illuminated space.

Luna ST12

12 Watt IK10 Rated Surface Mounted Tricolour Oyster

















Product	CCT	Trim Colour	Driver	Order Codes
ST12	Tricolour	White Trim	Leading & Trailing Edge	ST12-TRI-W-LT
		Black Trim		ST12-TRI-B-LT

Small-sized slim surface mounted SMD LED oyster light manufactured with highly durable polycarbonate body and opal diffuser. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with an integral Leading & Trailing Edge dimmable driver.

Specifications	
Trim Colour Options	White Black
Dimensions	Ø200 x 48 (H) mm
Weight	444 g
LED Power	12W
LED Type	SMD
Lumen Output	1249 lm
Efficacy	Up to 105 lm/W
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 80+
Lifetime	50,000 hours (L80)
Beam Angle	Wide 120°
System Power	11.9W Typical
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Leading & Trailing Edge
Driver	Integral, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP54
Impact Resistance	IK10
IEC Protection	Class II
Warranty	3 Years







Luna ST18

18 Watt IK10 Rated Surface Mounted Tricolour Oyster

















Product	CCT	Trim Colour	Driver	Order Codes
ST18	Tricolour	White Trim	Leading & Trailing Edge	ST18-TRI-W-LT
		Black Trim		ST18-TRI-B-LT

Medium-sized slim surface mounted SMD LED oyster light manufactured with highly durable polycarbonate body and opal diffuser. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with an integral Leading & Trailing Edge dimmable driver.

Specifications	
Trim Colour Options	White Black
Dimensions	Ø300 x 40 (H) mm
Weight	838 g
LED Power	18W
LED Type	SMD
Lumen Output	2071 lm
Efficacy	Up to 109 lm/W
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 80+
Lifetime	50,000 hours (L80)
Beam Angle	Wide 120°
System Power	19.1W Typical
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Leading & Trailing Edge
Driver	Integral, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP54
Impact Resistance	IK10
IEC Protection	Class II
Warranty	3 Years



Diameter 300 mm



Trend For Trade. Made For Trade.





For more product information, please visit our website.



Luna ST30

30 Watt IK10 Rated Surface Mounted Tricolour Oyster


















Product	CCT	Trim Colour	Driver	Order Codes
ST30	Tricolour	White Trim	Leading & Trailing Edge	ST30-TRI-W-LT
		Black Trim		ST30-TRI-B-LT

Large-sized slim surface mounted SMD LED oyster light manufactured with highly durable polycarbonate body and opal diffuser. An ideal lighting solution for general lighting applications.

Featuring colour switchable technology that enables users to switch between 3 colour temperature options - 3000K (warm white), 4000K (cool white) and 5700K (daylight). Supplied with an integral Leading & Trailing Edge dimmable driver.

Specifications	
Trim Colour Options	White Black
Dimensions	Ø400 x 52 (H) mm
Weight	1446 g
LED Power	30W
LED Type	SMD
Lumen Output	3385 lm
Efficacy	Up to 111 lm/W
CCT Technology	Tri-colour Selectable
Colour Temperature (CCT)	3000K, 4000K, 5700K
Colour Rendering	CRI 80+
Lifetime	50,000 hours (L80)
Beam Angle	Wide 120°
System Power	30.5W Typical
Input	200-240V AC 50 Hz
Power Factor	>0.95
Dimming	Leading & Trailing Edge
Driver	Integral, Flicker Free
Connection Type	Hardwired
Ingress Protection	IP54
Impact Resistance	IK10
IEC Protection	Class II
Warranty	3 Years



Diameter 400 mm



Bayled

brilliance engineered

Bayled raises the standard for flexibility, performance, and quality. Engineered to provide outstanding performance, visual comfort, and human-centric illumination, Bayled seamlessly integrates numerous features into a compact and versatile package. Its low-glare design minimizes shadows, and it comes suspended as standard, with an optional surface-mounted bracket. Ideal for workshops, manufacturing areas, warehousing, food packaging, cool stores, cold rooms, freezers, loading docks, distribution facilities and retail applications.





Bayled XPU100

100 Watt IP65 Rated Low Glare Low Bay

















Product	CCT	Trim Colour	Driver	Sensor*	Order Codes
XPU100	5000K	Black Trim	Non-dim		XPU1005-B-ND
					XPU1005-B-ND-MMS*

Optional Sensor*

Low bay manufactured with a robust integrated aluminium heatsink, industrial rated silicone gaskets and stainless steel fixtures designed with honeycomb reflector design that improves light performance while reducing glare. An ideal lighting solution for open plan areas.

Featuring 5000K (daylight) colour temperature option. Supplied with an integral flicker free IP65 rated driver. Optional motion sensor available.

Specifications

Trim Colour Options	Black
Dimensions	Ø320 x 177 (H) mm
Weight	5300 g
LED Power	100W
LED Type	COB
Lumen Output	13500 lm
Efficacy	92.89 lm/W
Colour Temperature (CCT)	5000K
Colour Rendering	CRI 90+
Lifetime	50,000 hours (L70)
Beam Angle	Wide
System Power	109W Typical
Input	220-240V AC 50/60 Hz
Power Factor	>0.90
Dimming	Non-dimmable
Driver	Integral, Flicker Free
Connection Type	Flex and Plug
Ingress Protection	IP65
Sensor Type*	Microwave Motion Sensor
IEC Protection	Class I
Warranty	3 Years

Height 177 mm



Diameter 320 mm



Diameter 320 mm

trendfortrade.com.au

89





Panel Light

attens

Oyster Light

Lowbays



Bayled XPU150

150 Watt IP65 Rated Low Glare Low Bay

















Product	CCT	Trim Colour	Driver	Sensor*	Order Codes
XPU150	5000K	Black Trim	Non-dim		XPU1505-B-ND
					XPU1505-B-ND-MMS*

Optional Sensor*

Low bay manufactured with a robust integrated aluminium heatsink, industrial rated silicone gaskets and stainless steel fixtures designed with honeycomb reflector design that improves light performance while reducing glare. An ideal lighting solution for open plan areas.

Featuring 5000K (daylight) colour temperature option. Supplied with an integral flicker free IP65 rated driver. Optional motion sensor available.

Specifications

Trim Colour Options	Black
Dimensions	Ø320 x 177 (H) mm
Weight	5300 g
LED Power	150W
LED Type	COB
Lumen Output	19850 lm
Efficacy	91.83 lm/W
Colour Temperature (CCT)	5000K
Colour Rendering	CRI 90+
Lifetime	50,000 hours (L70)
Beam Angle	Wide
System Power	161W Typical
Input	220-240V AC 50/60 Hz
Power Factor	>0.90
Dimming	Non-dimmable
Driver	Integral, Flicker Free
Connection Type	Flex and Plug
Ingress Protection	IP65
Sensor Type*	Microwave Motion Sensor
IEC Protection	Class I
Warranty	3 Years

Height 177 mm



Diameter 320 mm



Diameter 320 mm

trendfortrade.com.au

93

Trend For Trade. Made For Trade.



Proudly 100% Australian owned; our head office and warehouse are centrally located to the Sydney CBD and all modes of transport—placing our production facility in a unique position. With state offices now also located in Brisbane and Melbourne, we cater to clients in all Australian capital cities.



Sydney NSW Head Office & Warehouse 288 Coward Street Mascot NSW 2020 Phone (02) 9669 8888 sales@trendlighting.com.au



Brisbane QLD State Office Phone (07) 3200 9623 qld@trendlighting.com.au 2-12 Nealdon Drive Meadowbrook QLD 4131

unbeatable quality unparalled performance unmatched excellence

Started in 2021 after feedback from our trading partners, **Trend For Trade** has focused on developing and distributing energy-saving and cost-effective products accompanied by exceptional performance.

