TREND
LIGHT BY SOLID STATE

Maxiled XRS20-TRI

20W Recessed Adjustable Pull-out Downlight

Scan to explore
XRS20-TRI online

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XRS20-TRI	(3000K, 4000K, 5000K)	(CRI 90+ Standard)	WB (Wide)	W (White)	LT (Leading & Trailing Edge)

Order Code **XRS20-TRI-WB-W-LT**



Product Features

- Recessed LED downlight with adjustable 'pull-out' gimbal design
- Designed with a wide tilt adjustment of 80°, ultimate choice for highlighting vertical shelves, signage and merchandise
- Anodised black heatsink provides effective thermal management ensuring high output and long lifespan
- Colour Switchable options (3000K, 4000K, 5000K CCT)
- Supplied with a remote driver

To configure this downlight, please visit
trendlighting.com.au/product/maxiled-XRS20-TRI


Product Attributes

LED COB | CCT TRI | CRI 90+ | IP20 | NON IC | L&T DIM

Physical Characteristics

Trim Colour	White
Insert Colour	Black
Tilt Angle	80°
Rotation	355°
Dimensions	Ø145 x 102 (H) mm
Spring Height	40 mm
Cutout	Circular 120-130 mm
Weight	493 g

Dimensions (mm)

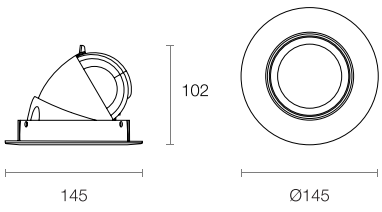


Cutout Ø120-130 mm

Technical Characteristics

Based on XRS20-TRI-WB-W-LT

LED Power	20W
LED Type	COB
Lumen Output	2650 lm
Luminous Flux	2074 lm
Efficacy	89.78 lm/W
CCT Technology	Tri-colour Switchable
Colour Temperature	3000K, 4000K, 5000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Wide

System Power	23.1W Typical
Driver Model	Trend DR-XRS20 (L&T)
Input	200-240V AC 50/60 Hz
Output	23-40V DC 500mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge

General Characteristics

Category	Downlights
Family	Maxiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20

© Trend Lighting. Specifications are subject to change.

Maxiled XRS20-TRI

20W Recessed Adjustable Pull-out Downlight

Scan to explore XRS20-TRI online

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XRS20-TRI	(3000K, 4000K, 5000K)	(CRI 90+ Standard)	WB (Wide)	W (White)	LT (Leading & Trailing Edge)

Order Code **XRS20-TRI-WB-W-LT**

To configure this downlight, please visit
trendlighting.com.au/product/maxiled-XRS20-TRI

Trim Colour



W
White Trim with Black Insert

© Trend Lighting. Specifications are subject to change.